

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number
WO 03/048458 A1(51) International Patent Classification: E01C 19/43,
23/02

(21) International Application Number: PCT/CA02/01864

(22) International Filing Date: 3 December 2002 (03.12.2002)


(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/000,448 4 December 2001 (04.12.2001) US(63) Related by continuation (CON) or continuation-in-part
(CIP) to earlier application:
US 10/000,448 (CIP)
Filed on 4 December 2001 (04.12.2001)(71) Applicant (for all designated States except US): INTE-
GRATED PAVING CONCEPTS INC. [CA/CA]; 102
17957 - 55th Avenue, Surrey, British Columbia V3S 6C4
(CA).(72) Inventor; and
(75) Inventor/Applicant (for US only): WILEY, Patrick, Carl
[CA/CA]; 6366 Selkirk Street, Chilliwack, British Colum-
bia V2R 2L7 (CA).(74) Agents: BAILEY, Thomas, W. et al.; OYEN WIGGS
GREEN & MUTALA, 480 - The Station, 601 West Cor-
dova Street, Vancouver, British Columbia V6B 1G1 (CA).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF FORMING AN INLAID PATTERN IN AN ASPHALT SURFACE

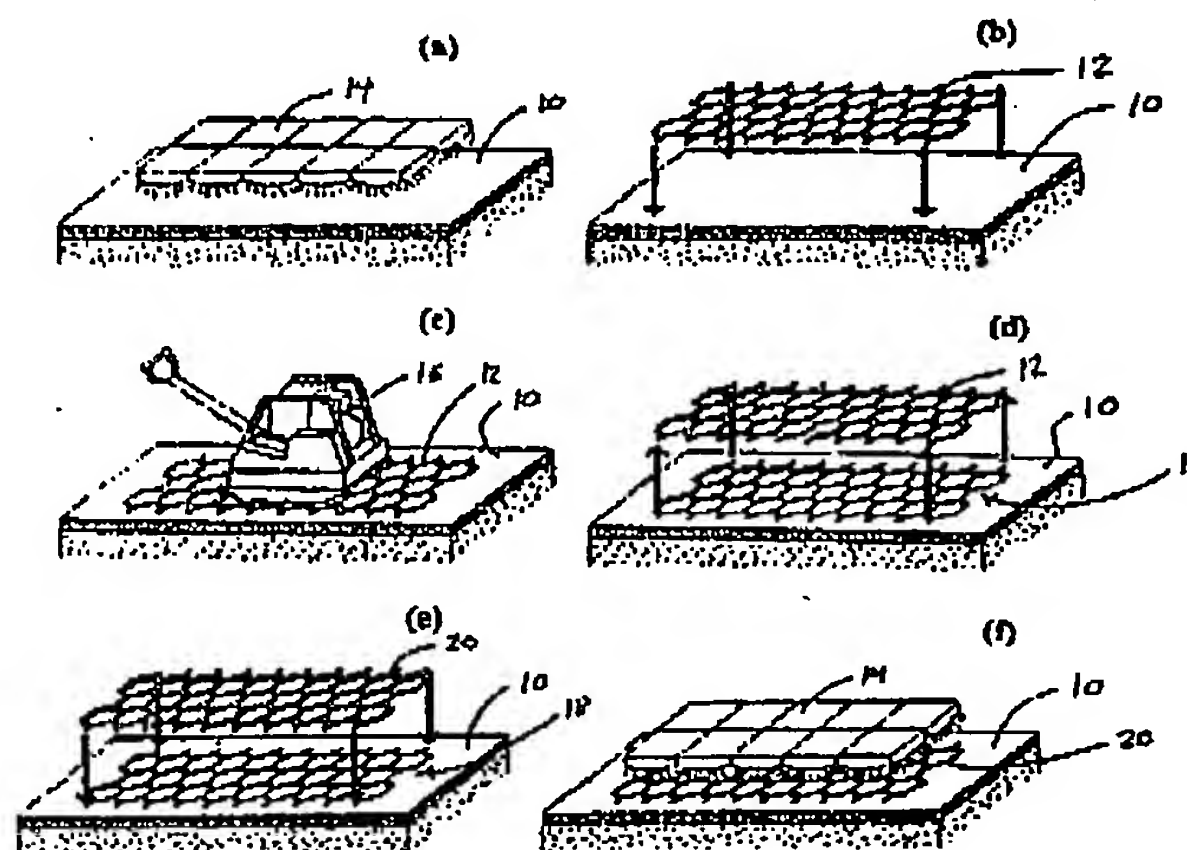

(57) Abstract: In one embodiment the method comprises the steps of providing a first template having a predetermined pattern; impressing the first template into the asphalt surface when the asphalt surface is in a pliable state to form an impression therein; removing the first template from the asphalt surface to expose the impression; providing a second template having a predetermined pattern matching the pattern of the first template; inserting the second template into the impression; and fixing the second template in position within the impression to form the inlaid pattern. The second template may consist of a preformed thermoplastic grid having a color and/or texture contrasting with the asphalt surface. In another embodiment the second template may include a light source for illuminating the template after it has been fixed in position. A heating method is described for gradually heating large asphalt surfaces using a reciprocating bank of infrared heaters to thermally fix the thermoplastic grid in place.

BEST AVAILABLE COPY

WO 03/048458 A1

WO 03/048458 A1

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2

WO 03/048458

PCT/CA02/01864

**METHOD OF FORMING AN INLAID PATTERN IN
AN ASPHALT SURFACE**

Technical Field

5

[0001] This application relates to a method of forming an inlaid pattern in an asphalt surface. The pattern may be selected for functional or decorative purposes.

10 **Background**

[0002] Various methods for forming patterns in asphalt surfaces are known in the prior art. The Applicant is the owner of United States Letters Patent No. 5,215,402 which describes a method of forming a
15 pattern in an asphalt surface using a removable template. The template is compressed into a pliable asphalt surface to imprint a predetermined pattern simulating, for example, the appearance of bricks, cobblestones, interlocking paving stones or the like. The template is then lifted clear of the asphalt surface and the asphalt is allowed to harden. A thin layer of a
20 cementitious coating may be applied to the imprinted asphalt to enhance the brick and mortar or other desired effect.

[0003] In the above-described method the template does not remain inlaid within the asphalt surface. The visual effect is created by the
25 combination of the imprinted pattern and the decorative coating. One drawback to this method is that the decorative coating may wear off over time, particularly in high traffic areas.

[0004] It is known in the prior art to install traffic markings on
30 asphalt surfaces. However, such markings typically project above the asphalt surface. In regions receiving frequent snowfalls during the winter months traffic markings may be removed or damaged by snowplow usage.

WO 03/048458

PCT/CA02/01864

- 2 -

5 [0005] Another known method for producing traffic markings involves grinding grooves in asphalt surfaces and then pouring into the grooves a hot molten material which is allowed to set in place. However, this is a very time consuming procedure and is not well suited for forming complicated patterns or covering large surface areas.

[0006] The need has therefore arisen for improved methods and materials for inlaying patterns in asphalt surfaces.

10 Summary of Invention

[0007] In accordance with the invention, a method of forming an inlaid pattern in an asphalt surface is disclosed. The method includes the steps of:

15

(a) providing a first template having a predetermined pattern;

20

(b) impressing the first template into the asphalt surface when the asphalt surface is in a pliable state to form an impression therein;

25

(c) removing the first template from the asphalt surface to expose the impression;

(d) providing a second template having a predetermined pattern matching the pattern of the first template;

(e) inserting the second template into the impression; and

30

(f) fixing the second template in position within the impression to form the inlaid pattern.

WO 03/048458

PCT/CA02/01864

- 3 -

[0008] The method may include the step of heating the asphalt surface in situ at the impression site prior to impressing the first template into the asphalt surface.

5 [0009] The step of fixing the second template in position within the impression comprises heating the second template to cause the second template to bond to the asphalt surface. For example, the second template may be heated to a temperature within the range of about 100° F - 400° F and more preferably within the range of 150° F - 350° F.

10

[0010] The second template may comprise a pre-formed thermoplastic grid of unitary construction. The color of the grid may be selected to contrast with the color of the asphalt surface. In another embodiment the grid may include a light source for lighting the grid once it has been set in
15 place in the asphalt surface. In other embodiments the grid may be luminescent or fluorescent, such as when subjected to light of a suitable wavelength. In one embodiment the first and/or second templates may include a plurality of frame elements defining open areas therebetween, the open areas comprising approximately 50 - 90 % of the total surface area of
20 each template.

[0011] In one embodiment the second template may comprise an upper surface which is substantially flush with the surface of the asphalt when the second template is fixed in position. Alternatively, a portion of the second
25 template may be raised above the asphalt surface or recessed below the asphalt surface when it is set in place.

[0012] The second template may be formed from a plurality of frame elements each having a relatively narrow width to facilitate compression of
30 the template into the asphalt surface. For example, the frame elements may have a width between ¼ inch and 4 inches.

WO 03/048458

PCT/CA02/01864

- 4 -

[0013] In a further alternative embodiment the asphalt surface may be heated in situ and the template may be compressed into the asphalt surface directly while the asphalt is in a pliable state and without deforming the desired predetermined pattern. The template is then fixed in place as in the embodiment described above. Templates adapted for impression forming and inlaid applications are described herein.

[0014] In one aspect of the invention a method of forming an inlaid pattern in an asphalt surface is described comprising:

- (a) gradually heating the asphalt surface in situ until it is in a pliable state by periodically passing an infrared heater thereover;
- (b) forming an impression in the asphalt surface;
- (c) introducing a settable material into the impression; and
- (d) allowing the settable material to set within the impression to form the inlaid pattern.

In another aspect of the invention the method of forming an inlaid pattern comprises:

- (a) forming an impression in the asphalt surface;
- (b) placing a thermoplastic template into the impression; and

WO 03/048458

PCT/CA02/01864

- 5 -

- (c) gradually heating the thermoplastic template by periodically passing at least one heater thereover until the template adheres to the asphalt surface.
- 5 The heater is preferably a reciprocating infrared heater capable of heating a relatively large surface area, such as greater than 10 square feet, while permitting visual monitoring of the work site. For example, a heating apparatus having a frame extendable over the asphalt surface may be provided and the infrared heater(s) may reciprocate on the frame to
- 10 gradually heat the asphalt surface and/or the inlaid template.

Brief Description of Drawings

- 15 [0015] In drawings which illustrate embodiments of the invention, but which should not be construed as restricting the spirit or scope of the invention in any way,
- [0016] Figure 1(a) is a perspective view of a portable heater for pre-
- 20 heating an asphalt surface;
- [0017] Figure 1(b) is a perspective view of a first template defining a predetermined pattern for imprinting an asphalt surface;
- 25 [0018] Figure 1(c) is a perspective view of the first template being forcefully compressed into the asphalt surface using a compaction apparatus;
- [0019] Figure 1(d) is a perspective view of the first template being
- 30 lifted clear of the asphalt surface to expose an impression having the predetermined pattern;

WO 03/048458

PCT/CA02/01864

- 6 -

5 [0020] Figure 1(e) is a perspective view of a second template having a pattern matching the pattern of the first template and showing the second template being lowered into the impression formed in the asphalt surface;

[0021] Figure 1(f) is a perspective view of a portable heater for reheating the asphalt surface to fix the second template in position within the impression;

10 [0022] Figure 2(a) is a perspective view of a portable heater for preheating an asphalt surface as in Figure 1(a);

15 [0023] Figure 2(b) is a perspective view of a template defining a predetermined pattern and suitable for direct compression into the asphalt surface;

20 [0024] Figure 2(c) is a perspective view of the template of Figure 2(b) being forcefully compressed into the asphalt surface using a compaction apparatus without deforming the predetermined pattern;

[0025] Figure 2(d) is a perspective view of a portable heater for reheating the asphalt surface to fix the second template in position;

25 [0026] Figure 3 is a perspective view of a template of Figures 1 and 2;

30 [0027] Figure 4(a) is a diagrammatic side elevational view of the method of Figure 2 wherein the template is delivered from a spool mounted on a vehicle having a drum roller; and

WO 03/048458

PCT/CA02/01864

- 7 -

[0028] Figure 4(b) is a plan elevational view of the method of Figure 4(a).

5 [0029] Figure 5 is perspective view of an apparatus comprising reciprocating infrared heaters for gradually heating a template inlaid in an asphalt surface.

[0030] Figure 6 is an end elevational view of the reciprocating heaters of Figure 5.

10

[0031] Figure 7 is a graph showing the gradual increase in the asphalt surface temperature with successive passes of the reciprocating heaters of Figure 5.

15 Description

[0032] Throughout the following description, specific details are set forth in order to provide a more thorough understanding of the invention. However, the invention may be practiced without these particulars. In
20 other instances, well known elements have not been shown or described in detail to avoid unnecessarily obscuring the invention. Accordingly, the specification and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

25 [0033] With reference to the drawings, this application relates to methods and apparatus for imprinting an asphalt surface 10. As used in this patent application "asphalt" means a paving compound for constructing roads, driveways, walkways and the like which consists of a combination of bituminous binder, such as tar, and an aggregate, such as sand or
30 gravel.

WO 03/048458

PCT/CA02/01864

- 8 -

5 [0034] As shown in Figure 1(b), a first template 12 is provided for imprinting a predetermined pattern in asphalt surface 10. The predetermined pattern may serve a specific function, such as a crosswalk marking, or it may be purely decorative. In the illustrated embodiment first template 12 comprises a flexible grid defining a plurality of open areas (Figure 3). However, it should be appreciated that the structure of first template 12 may vary without departing from the invention. For example, template 12 may have a flat, continuous top surface and a plurality of projections formed on its bottom surface arranged in the desired pattern.

10

15 [0035] Template 12 is compressed into asphalt surface 10 when surface 10 is in a pliable state. For example, template 12 may be compressed into hot, freshly rolled asphalt (which is typically on the order of 150° - 400° F depending upon the type of asphalt). Alternatively, a portable surface heater 14 may be provided (Figure 1(a)) for preheating a preexisting asphalt surface 10 to a pliable state. As used in this patent application the term heating "in situ" refers to heating a pre-existing asphalt surface at the work site rather than using hot asphalt heated off-site.

20

25 [0036] Template 12 may be compressed into surface 10 with a mechanical compactor, such as a vibrating plate compactor 16 or a drum roller (Figure 1(c)). After template 12 has been compressed into asphalt surface 10, it is removed to expose an impression 18 in the desired pattern (Figure 1(d)). For example, impression 18 may consist of a plurality of channels or simulated grout lines. By way of another example, impression 18 may be the outline of a corporate logo or decorative design.

30 [0037] The next step in the process is to provide a second template 20 configured to fit within impression 18. As shown in Figure 1(e)), second template 20 preferably has a shape and layout matching at least

WO 03/048458

PCT/CA02/01864

- 9 -

partly the pattern of first template 12. In one embodiment of the invention second template 20 may match the pattern of first template 12 (and hence impression 18) exactly. In an alternative embodiment of the invention, second template 20 may partially but not completely match the pattern of first template 12. In this case second template 20 partially fills impression 18 when it is inlaid within asphalt surface 10.

[0038] Second template 20 is positioned within impression 18 as shown in Figure 1(e). If necessary, the impressed asphalt surface 10 may be reheated before positioning template 20 within impression 18. In one embodiment of the invention second template 20 may consist of a preformed grid formed from a thermoplastic material. A suitable thermoplastic material is available from Lafarge Road Markings and is sold under the trademark THERMALINE™. Rubber, plastic or other materials suitable for inlaying in asphalt surface 10 could also optionally be employed. Template 20 may have a color and/or texture designed to contrast with asphalt surface 10. In one possible arrangement the depth of template 20 is less than or equal to the depth of impression 18 so that template 20 does not extend above the plane of asphalt surface 10 when it is inlaid in position. This could an advantage, for example, in the case of traffic markings which may be slippery and hence potentially hazardous to motorists and bicyclists if not inlaid. In another possible arrangement, the depth of template 20 exceeds that of impression 18 so that template 20 is raised above the plane of asphalt surface 10 when set in position. In this latter arrangement template 20 is both visually and tactilely distinguishable from asphalt surface 10. This may be useful, for example, in regulating the speed of vehicles traversing a paved roadway or the like.

[0039] In one embodiment of the invention templates 12 and 20 are formed from a plurality of frame elements 13 which are relatively narrow in width and are arranged in a grid (Figure 3). This ensures that such

WO 03/048458

PCT/CA02/01864

- 10 -

templates can be readily compressed into asphalt surface 10. Also, in high traffic areas, frame elements 13 of relatively narrow width are less subject to wear. For example, frame elements 13 may have a width less than the width of a standard automobile tire. A width size between 1/4 inch and 4 inches is suitable for many applications. Ordinarily frame elements 13 will not be less than 1/4 inch in width to ensure that they are readily visible once template 20 is fixed in position (although they may be some applications where very narrow frame elements 13 could be employed). Also, there are applications where very wide frame elements 13 or templates 12, 20 having continuous surfaces could be employed as discussed further below.

[0040] The thickness of frame elements 13 is also variable depending upon the application. The preferred thickness range is between 20 - 160 mil with 40 - 130 mil being the most preferred range. If the frame elements are very thin template 20 will be overly fragile. Conversely, if frame elements 13 are too thick templates 12, 20 will be difficult to compress into place. The optimum size and dimensions of frame elements 13 may depend in part on the pliability of asphalt surface 10 (i.e. whether the asphalt is relatively coarse or mastic in composition)

[0041] As shown in Figure 3, frame elements 13 of templates 12, 20 may define a plurality of open areas 15. In one embodiment of the invention open areas 15 comprise approximately 50 - 90% of the total surface area of templates 12, 20. Conversely closed areas defined by frame elements 13 comprise approximately 10 - 50% of the total surface area of templates 12, 20. The above ratios facilitate impression of templates 12, 20 into asphalt surface 10 using a conventional roller or plate compactor 16. For example, each frame element 13 could be 1/2 inch wide and the spaces between elements 13 could be 3 1/2 wide. The total surface area of the template 12, 20 could be 4 square feet (i.e. 2' X 2'). Using a

WO 03/048458

PCT/CA02/01864

- 11 -

standard plate compactor 16, downward compressive force will applied to frame elements 13 only and hence the effective compressive force (i.e. pounds per square inch of frame elements 13) will be sufficient to readily compress template 12 or 20 into surface 10. However, if the ratio of closed areas to open areas as defined above is increased by substantially increasing the width of frame elements 13, then the effective compressive force per surface area of frame elements 13 will be correspondingly reduced. Accordingly, a larger compactor 16 having a higher compressive force rating may be required to impress templates 12, 20 into asphalt surface 10. It is advantageous to manufacture templates 12, 20 which can be readily compressed using commonly available equipment. In one suitable embodiment the total closed surface area of template 12, 20 underlying compactor 16 may be approximately 10 - 50% of the surface area of the plate portion of compactor 16 which applies a compressive force (Figure 1(c)).

[0042] The final step in the installation procedure is to fix second template 20 in position within impression 18. In the embodiment illustrated in Figure 1(f), portable surface heater 14 is passed over the surface of second template 20 after it has been positioned within impression 18 to reheat surface 10. If template 20 is formed from a thermoplastic material as described above, this causes template 20 to flow into the interstices of impression 18 thereby enhancing adhesion to asphalt surface 10. Once template 20 is fully seated within impression 18, heater 14 is removed and template 20 is allowed to set in place. Alternatively template 20 may be pre-heated prior to its placement within impression 18 to facilitate template seating. Depending upon the material used, the second template 20 may be pre-heated or heated in situ to a temperature within the range of 100° - 400° F, or more particularly 150° - 350° F.

30

WO 03/048458

PCT/CA02/01864

- 12 -

- 5 [0043] Another possible means for fixing template 20 within impression 18 is by the use of conventional glue adhesives. For example, impression 18 could be coated with a glue adhesive prior to the placement of template 20 therein. The step of fixing template 20 in position could therefore include applying the glue and allowing the glue sufficient time to set. Alternatively template 20 may comprise a tear-off layer which may be removed on site to expose an adhesive surface capable of bonding to asphalt surface 10.
- 10 [0044] In one possible embodiment of the invention, template 20 may consist of reflective material suitable for designating pedestrian crosswalks, turning lanes and the like. In another embodiment template 20 may include a light source or LED display for illuminating template 20 in its inlaid position, such as for safety or decorative purposes. Similarly, 15 template 20 may be formed from fluorescent material or material which is luminescent when subjected to light of a suitable wavelength (such as ultraviolet light). In another embodiment template 20 may be constructed from a skid-resistant material.
- 20 [0045] After template 20 has been inlaid, asphalt surface 10 may optionally be treated with a clear protective sealer. For example, the sealer could be formulated to protect surface 10 from oxidization and moisture damage, thereby preventing premature aging and discoloration of the patterned surface. The sealer could be an acrylic sealer commonly 25 used in other applications to coat cementitious substrates.
- [0046] In an alternative embodiment of the invention shown in Figure 2 second template 20 may be compressed directly into asphalt surface 10 without first forming an impression 18 using first template 12. In order for 30 this alternative method to work effectively asphalt surface 10 must be sufficiently pliable such that template 20 will not deform from the desired

WO 03/048458

PCT/CA02/01864

- 13 -

pattern when it is compressed into surface 10. As in the embodiment discussed above, surface 10 may be preheated in situ to a pliable state (Figure 2(a). As shown in Figures 2(b) and 2(c), template 20 is then compressed directly into surface 10. Surface 10 is then reheated after
5 template 20 is in position to fix template 20 in place (Figure 2(d)).

[0047] Figures 4(a) and 4(b) illustrate apparatus useful for carrying out the alternative method of the invention described above in an automated fashion. In the illustrated embodiment first template 20 is sufficiently flexible that it may be wound around a spool 22 mounted on a
10 vehicle 24. Vehicle 24 also includes a drum roller 26 for progressively compressing template 20 into asphalt surface 10 as template 20 is unwound from spool 22. Portable surface heaters 14 move in advance of and behind vehicle 24 to pre-heat and re-heat the asphalt surface.

15 [0048] As will be apparent to a person skilled in the art, in an alternative embodiment of the invention template 12 could be provided on a drum roller rather than being a physically separate apparatus. That is, the means for forming impression 18 in asphalt surface 10 could be a
20 surface contacting portion of compressive apparatus 16 itself. However, template 20 must be capable of being separated from compressive apparatus 16 since it remains inlaid within impression 18 as described above and shown, for example, in Figure 4(a).

25 [0049] Figure 5 illustrates a further alternative embodiment of the invention. In this embodiment a mobile heating apparatus 30 is provided as the portable surface heater 14. Apparatus 30 includes elongated rails 32 which are supported above asphalt surface 10 by support legs 34 and housing 36. A heater truck 38 is provided for reciprocating movement on
30 rails 32. Truck 38 supports a bank of infrared heaters 40 at positions close to asphalt surface 10 (e.g. approximately 2 inches above the ground).

WO 03/048458

PCT/CA02/01864

- 14 -

[0050] As shown in Figures 5 and 6, in operation infrared heaters 40 travel back and forth over asphalt surface 10 to gradually heat surface 10 and template 20 inset therein. For example, template 20 may be formed from a thermoplastic material as described above. Heaters 40 may be used to heat template 20 to a temperature sufficient to fix template 20 in place within a surface impression 18 (Figures 1(e) and 1(f)).

[0051] In one embodiment heaters 40 move through three cycles per minute (each cycle being a traversal of truck 38 from housing 36 to the distal end of rails 32 and back again). An important advantage of the heating method of Figure 5 is that a relatively large surface area of asphalt 10 can be heated gradually and evenly. This approach avoids the disadvantages of hand-held torch heaters which cannot easily be used to evenly heat large areas and have a tendency to scorch the thermoplastic material and/or the asphalt. For example, depending upon its composition, asphalt can scorch when subjected to sustained temperatures above approximately 325°F. Figure 7 is a graph showing the changing temperature profile of asphalt surface 10 with successive passes of heaters 40. Surface 10 is allowed to cool after each heating cycle. The temperature of surface 10 (and template 20 in-laid therein) gradually increases with successive heating cycles until the desired temperature suitable for thermoplastic/asphalt adhesion is achieved. The asphalt surface is subjected to a relatively slow heat soak to permit heat to gradually penetrate below the uppermost surface layer.

[0052] Further, heating apparatus 30 allows the operator to visually monitor the work site during the heating operation. For example, in use templates 20 may be manufactured in mats approximately 2' by 2' in size for ease of handling. Multiple templates 20 may be arranged to cover a large surface area. The templates 20 could be arranged so that the frame

WO 03/048458

PCT/CA02/01864

- 15 -

elements 13 (Figure 3) of adjacent templates are partially overlapping at the joinder sites. The gradual heating method described above could be continued until the overlapping frame elements melt together and adhere. Heating apparatus 30 allows the operator to visually monitor this process
5 to avoid underheating or overheating.

[0053] As will be appreciated by a person skilled in the art, the gradual heating method shown in Figures 5 - 6 could be used to facilitate adherence of thermoplastic or other settable markings to any comparatively
10 large asphalt surface 10, such as adherence of in-laid or projecting traffic markings. One advantage of this approach in comparison to conventional painted-on traffic markings is that the installation process is not weather dependent. Also the marking would not become obliterated by wear of the surface layer (i.e. since the marking color would extend consistently
15 throughout the thickness of the marking).

[0054] In a further embodiment of the invention, the applicant's method could be employed to form an inlaid pattern in asphalt surface 10 wherein only the edge portion(s) of the template or other inlaid marking
20 are inlaid. For example, a thermoplastic inlaid traffic marking having a gently curved upper surface could be provided. An impression 18 could be formed in surface 10 conforming to the contour of the periphery of the marking. Impression 18 could be formed so that only edge portions of the marking are inlaid to ensure that the edges will not be caught by snow
25 plows in regions having winter snowfalls. Further, the curvature of the traffic marking could enhance the reflectivity of the thermoplastic material to improve traffic safety.

[0055] In one embodiment of the invention the gradual heating
30 method of Figures 5 - 6 could be used to heat comparatively large thermoplastic surfaces, such as corporate logos, traffic markings,

WO 03/048458

PCT/CA02/01864

- 16 -

pedestrian walkways, driveways or the like. In this embodiment the grid-like thermoplastic template 20 could be replaced by continuous thermoplastic sheets formed in the desired shape and pattern. As in the embodiment described above, it is important to heat the thermoplastic material gradually and evenly to achieve optimum adhesion to the underlying asphalt surface 10. In this embodiment heaters 40 would primarily heat the thermoplastic material to promote adhesion although some ancillary heating of the surrounding asphalt surface could also occur. In this embodiment the thermoplastic sheets may not be inlaid but may nevertheless be gently heated as described above to adhere to the underlying asphalt substrate.




[0056] In still further alternative embodiments of the invention heating apparatus 30 may be modified to include one or more heat sensors for sensing the temperature of asphalt surface 10. The heat sensors could be mounted on truck 38 to travel over surface 10 and scan the temperature thereof. Apparatus 30 may also include a controller for switching off one or more of the heaters 40 in the heater bank depending upon the measured surface temperature. For example, once the surface temperature achieves a target value, some of the heaters 40 could be switched off to prevent further heating and possible scorching of the asphalt while other heaters 40 could remain on to maintain the surface temperature at or near the target value.

[0057] As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

WO 03/048458

1/7

PCT/CA02/01864

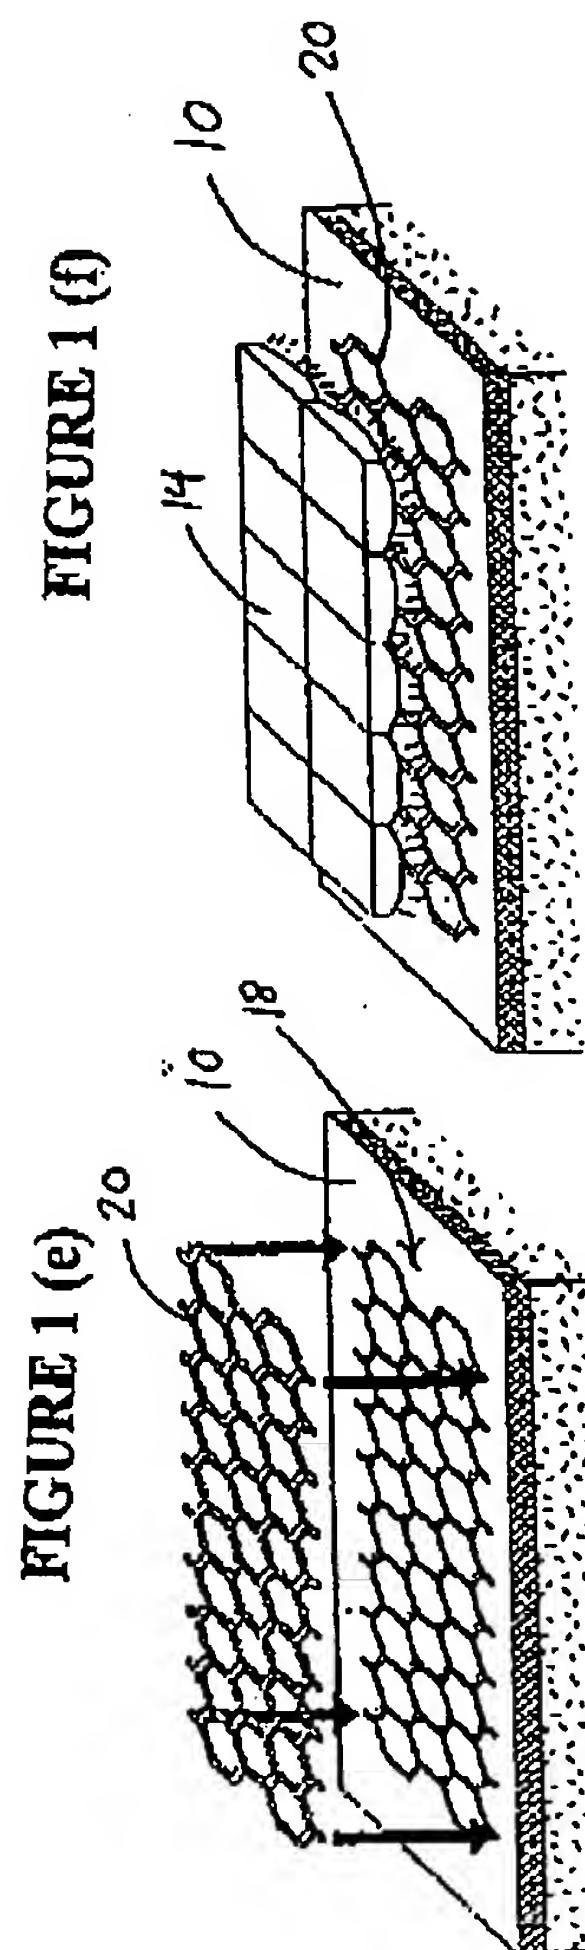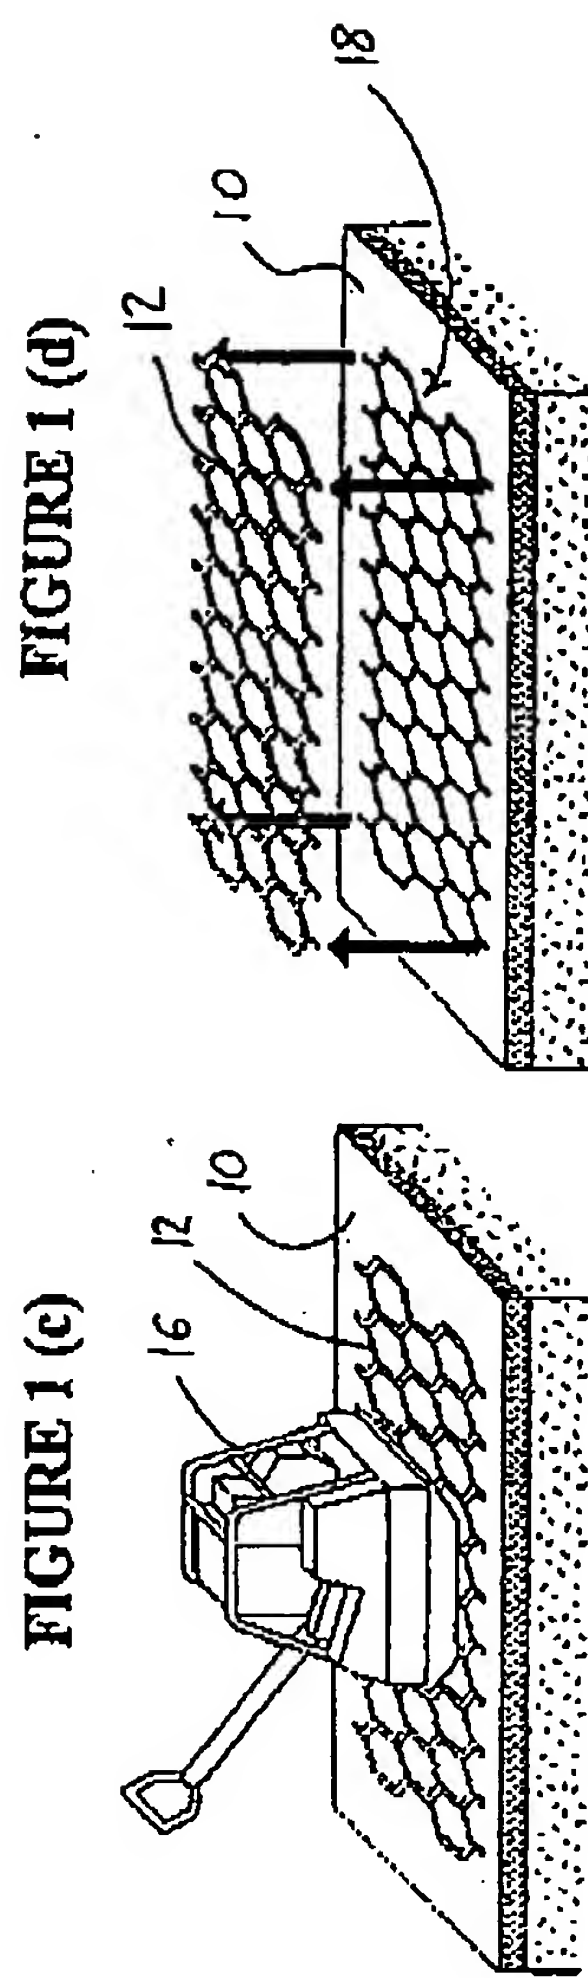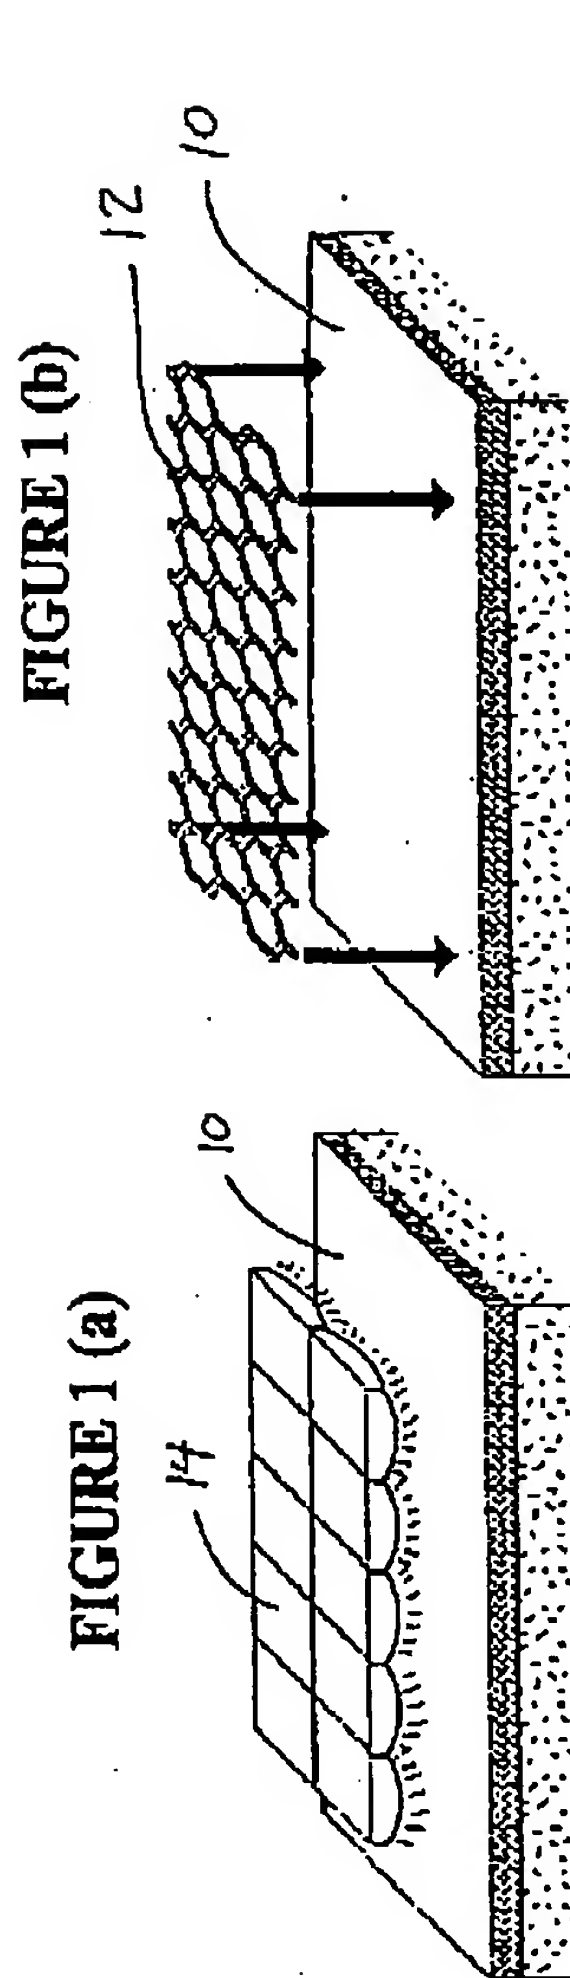

WO 03/048458

2/7

PCT/CA02/01864

FIGURE 2 (b)

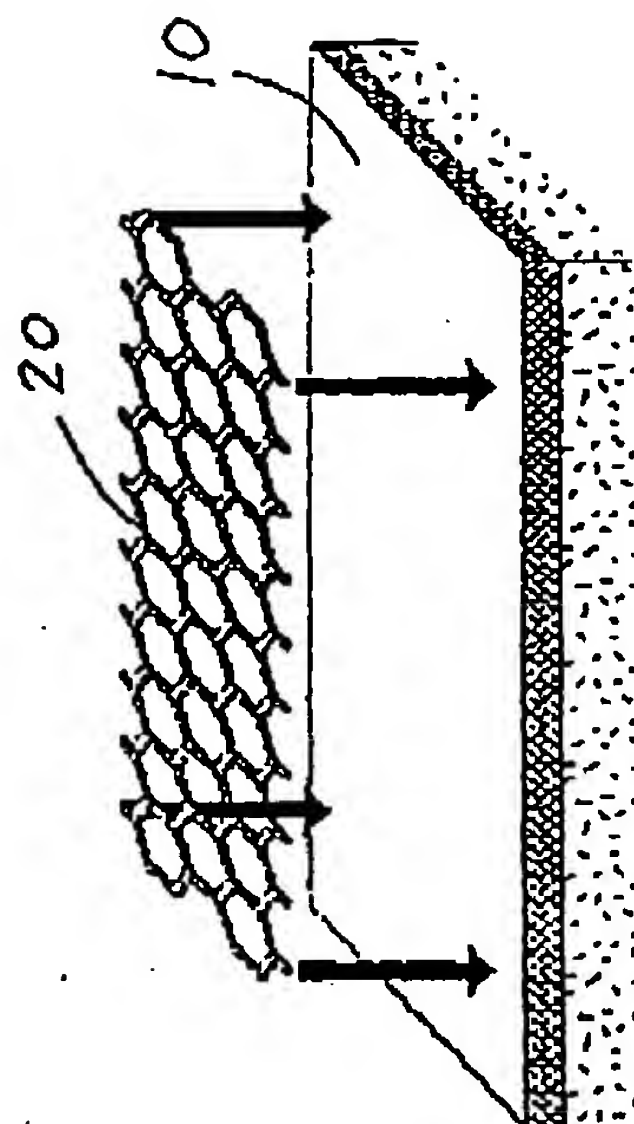


FIGURE 2 (d)

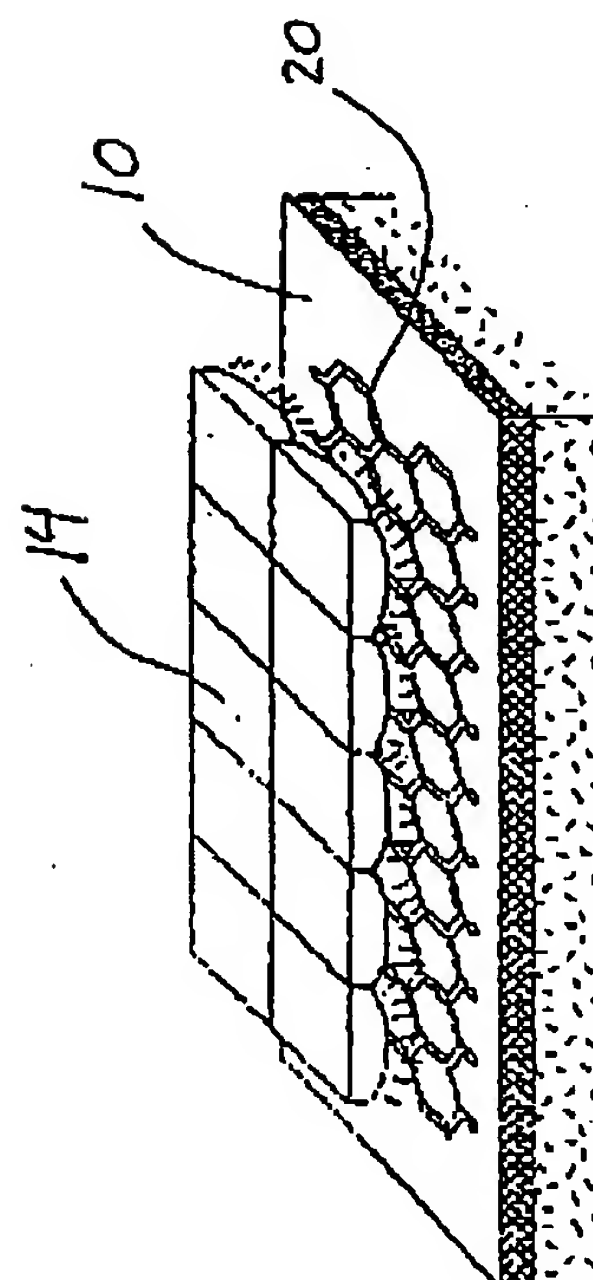


FIGURE 2 (a)


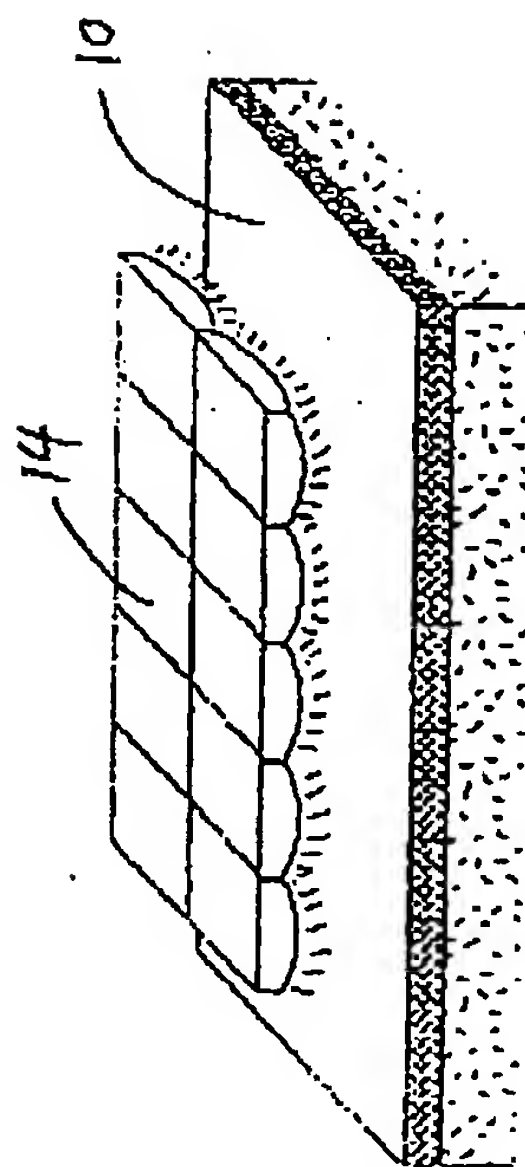


FIGURE 2 (c)

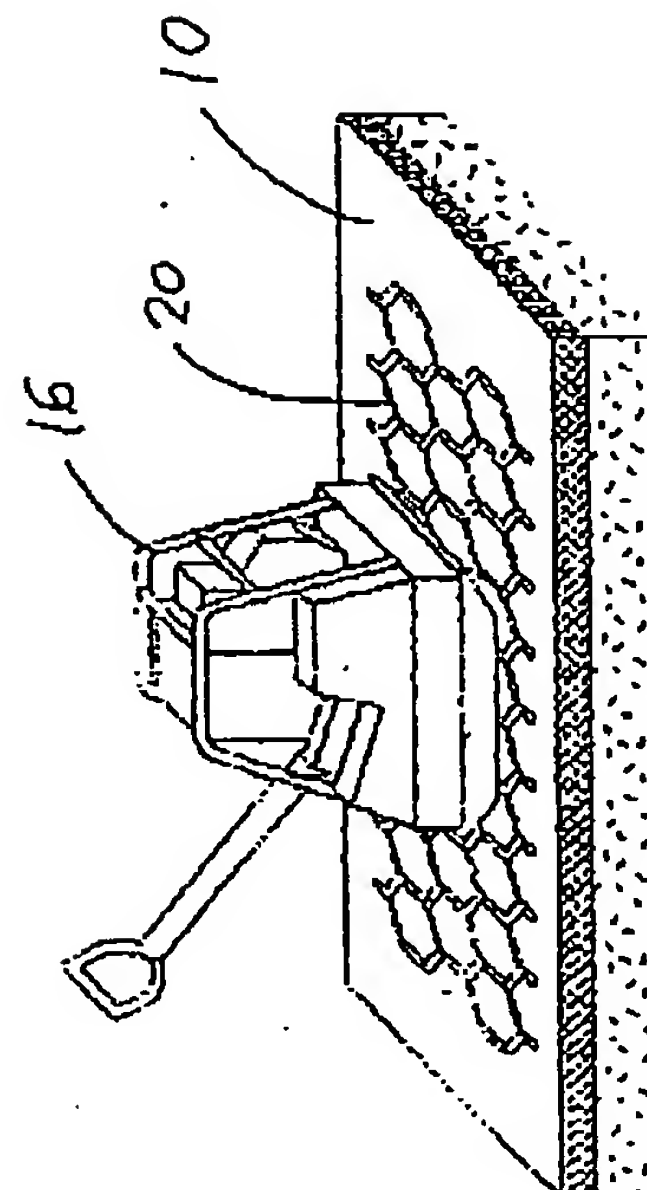


WO 03/048458

3/7

PCT/CA02/01864

FIGURE 3

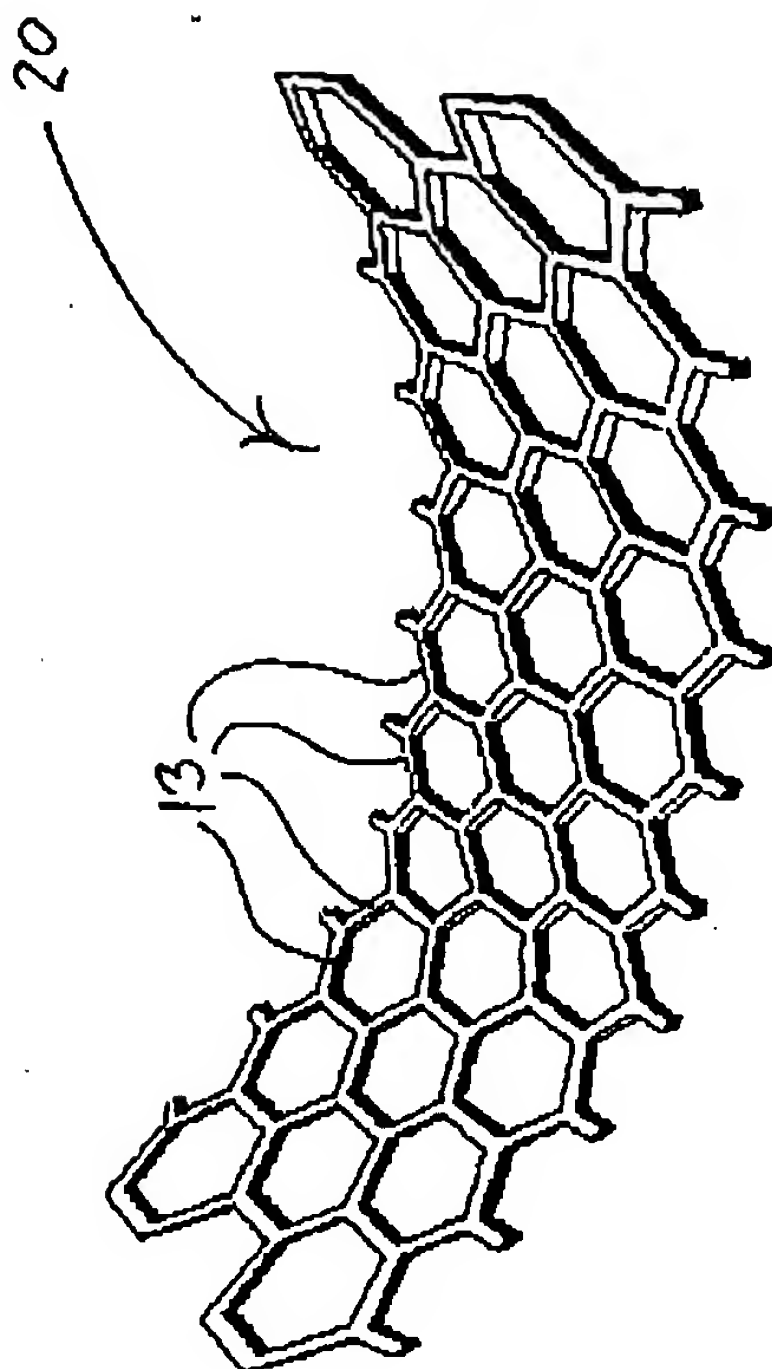

WO 03/048458

4/7

PCT/CA02/01864

FIGURE 4 (a)


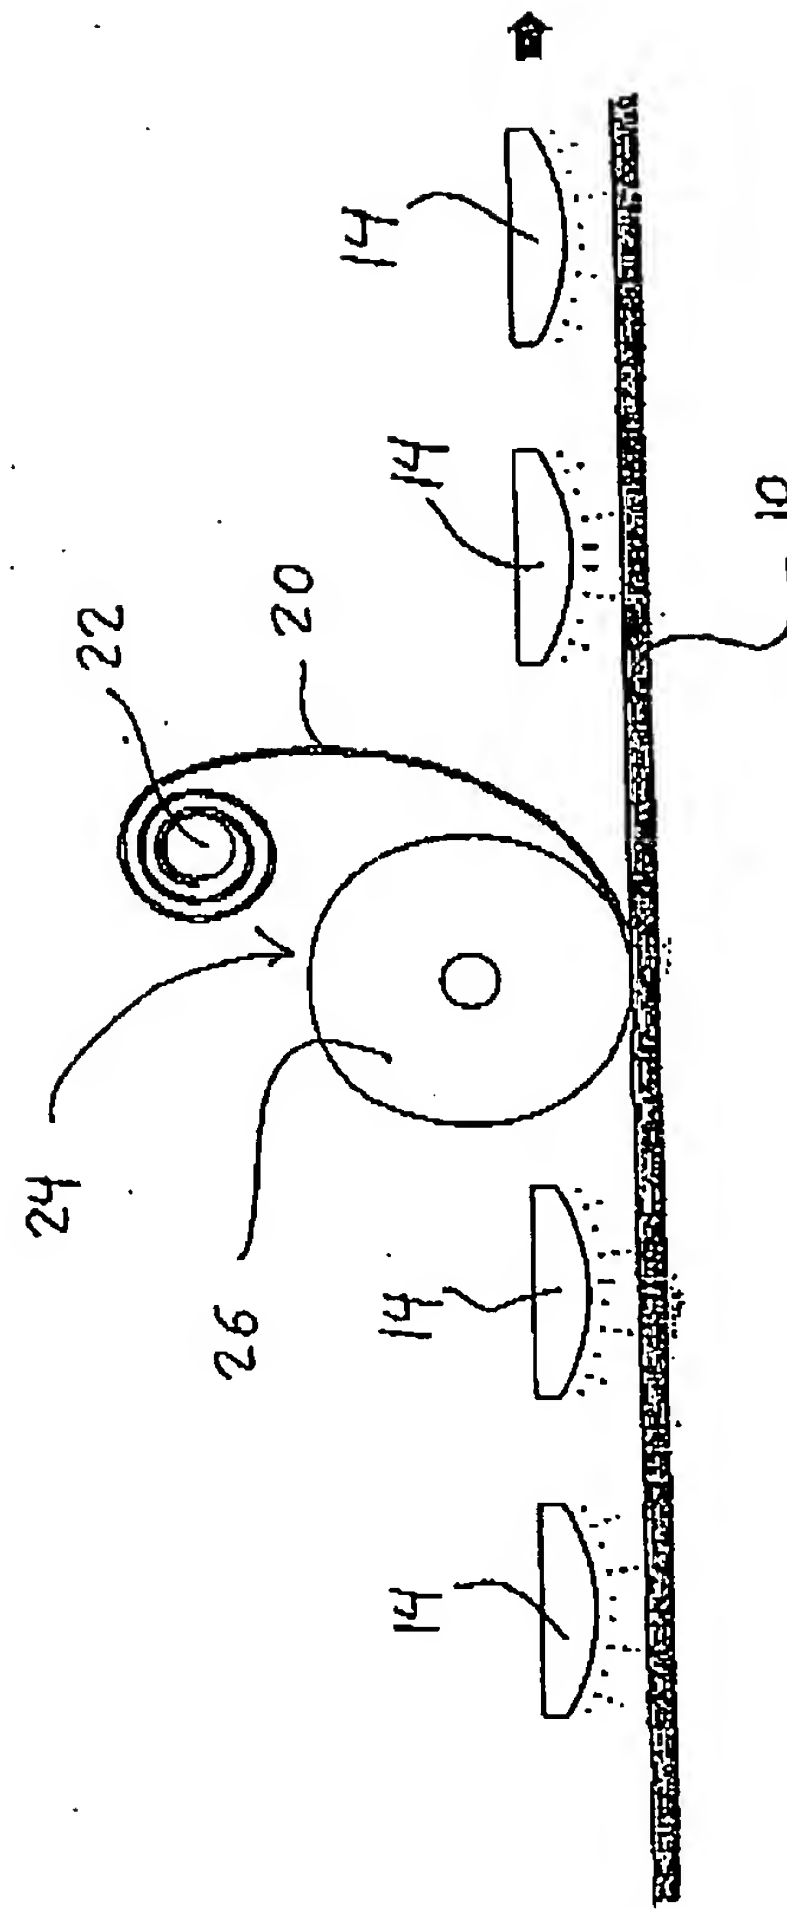


FIGURE 4 (b)

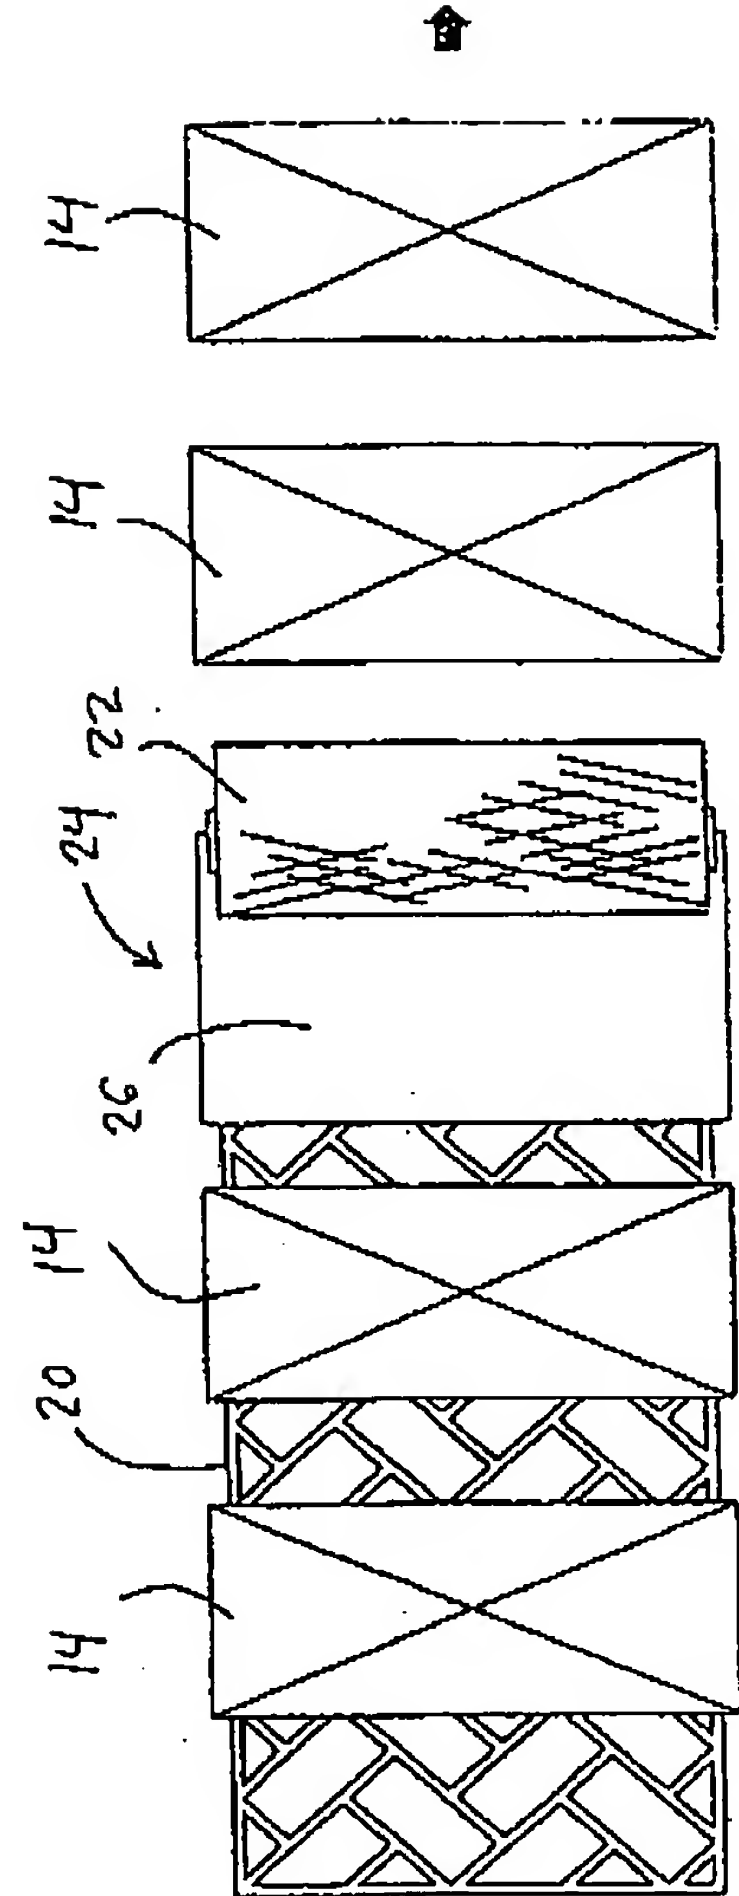


WO 03/048458

PCT/CA02/01864

5/7

FIGURE 5

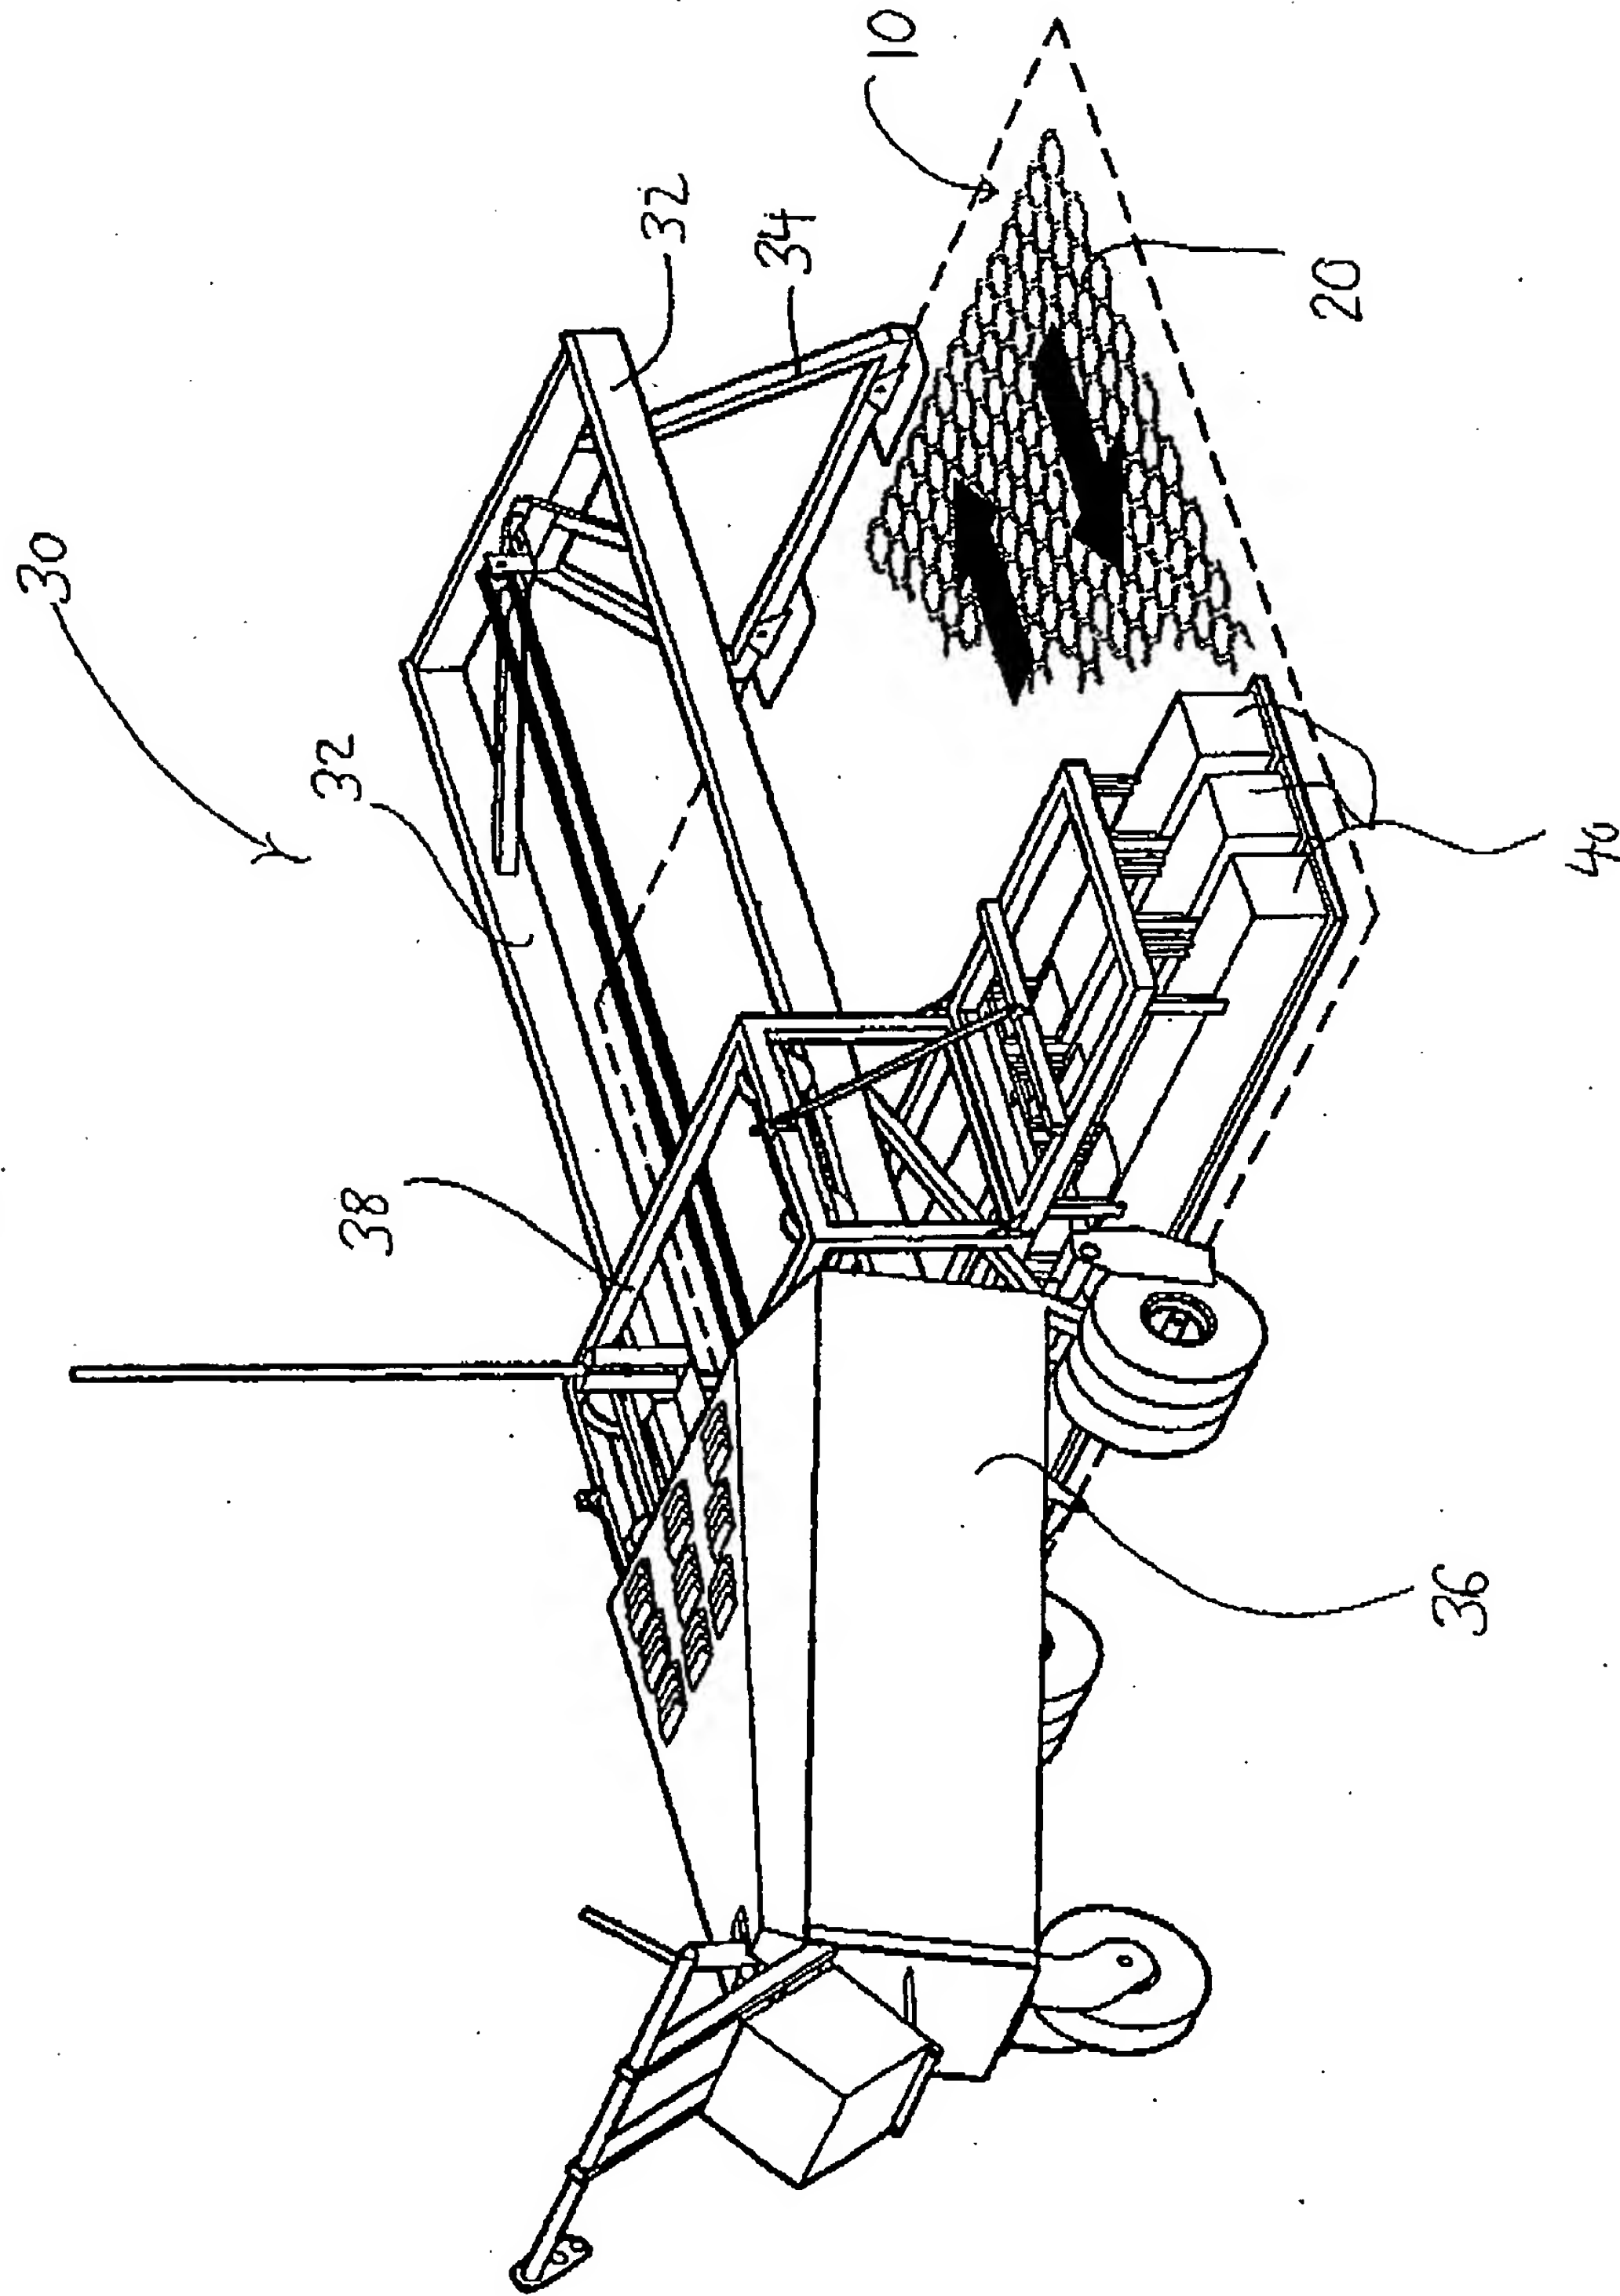


WO 03/048458

6/7

PCT/CA02/01864

FIGURE 6

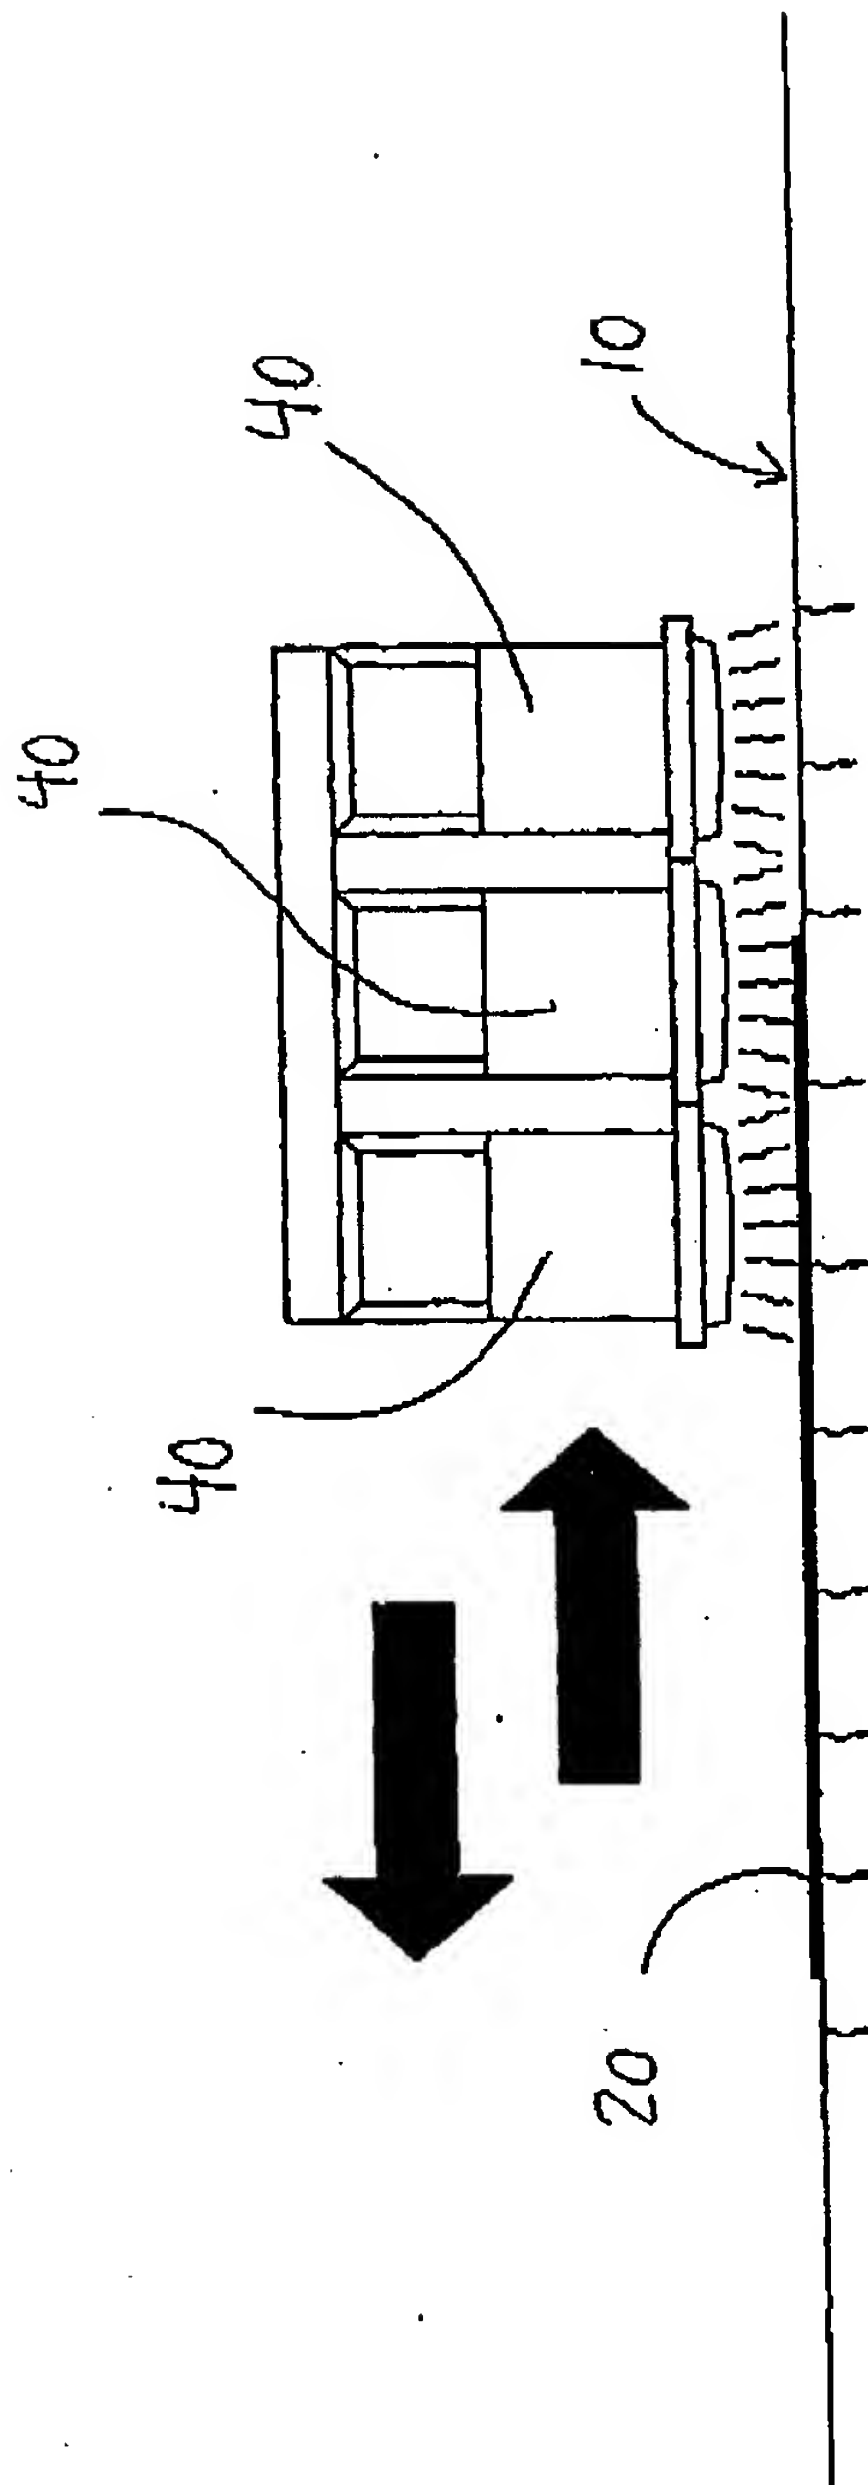


WO 03/048458

PCT/CA02/01864

7/7

FIGURE 7

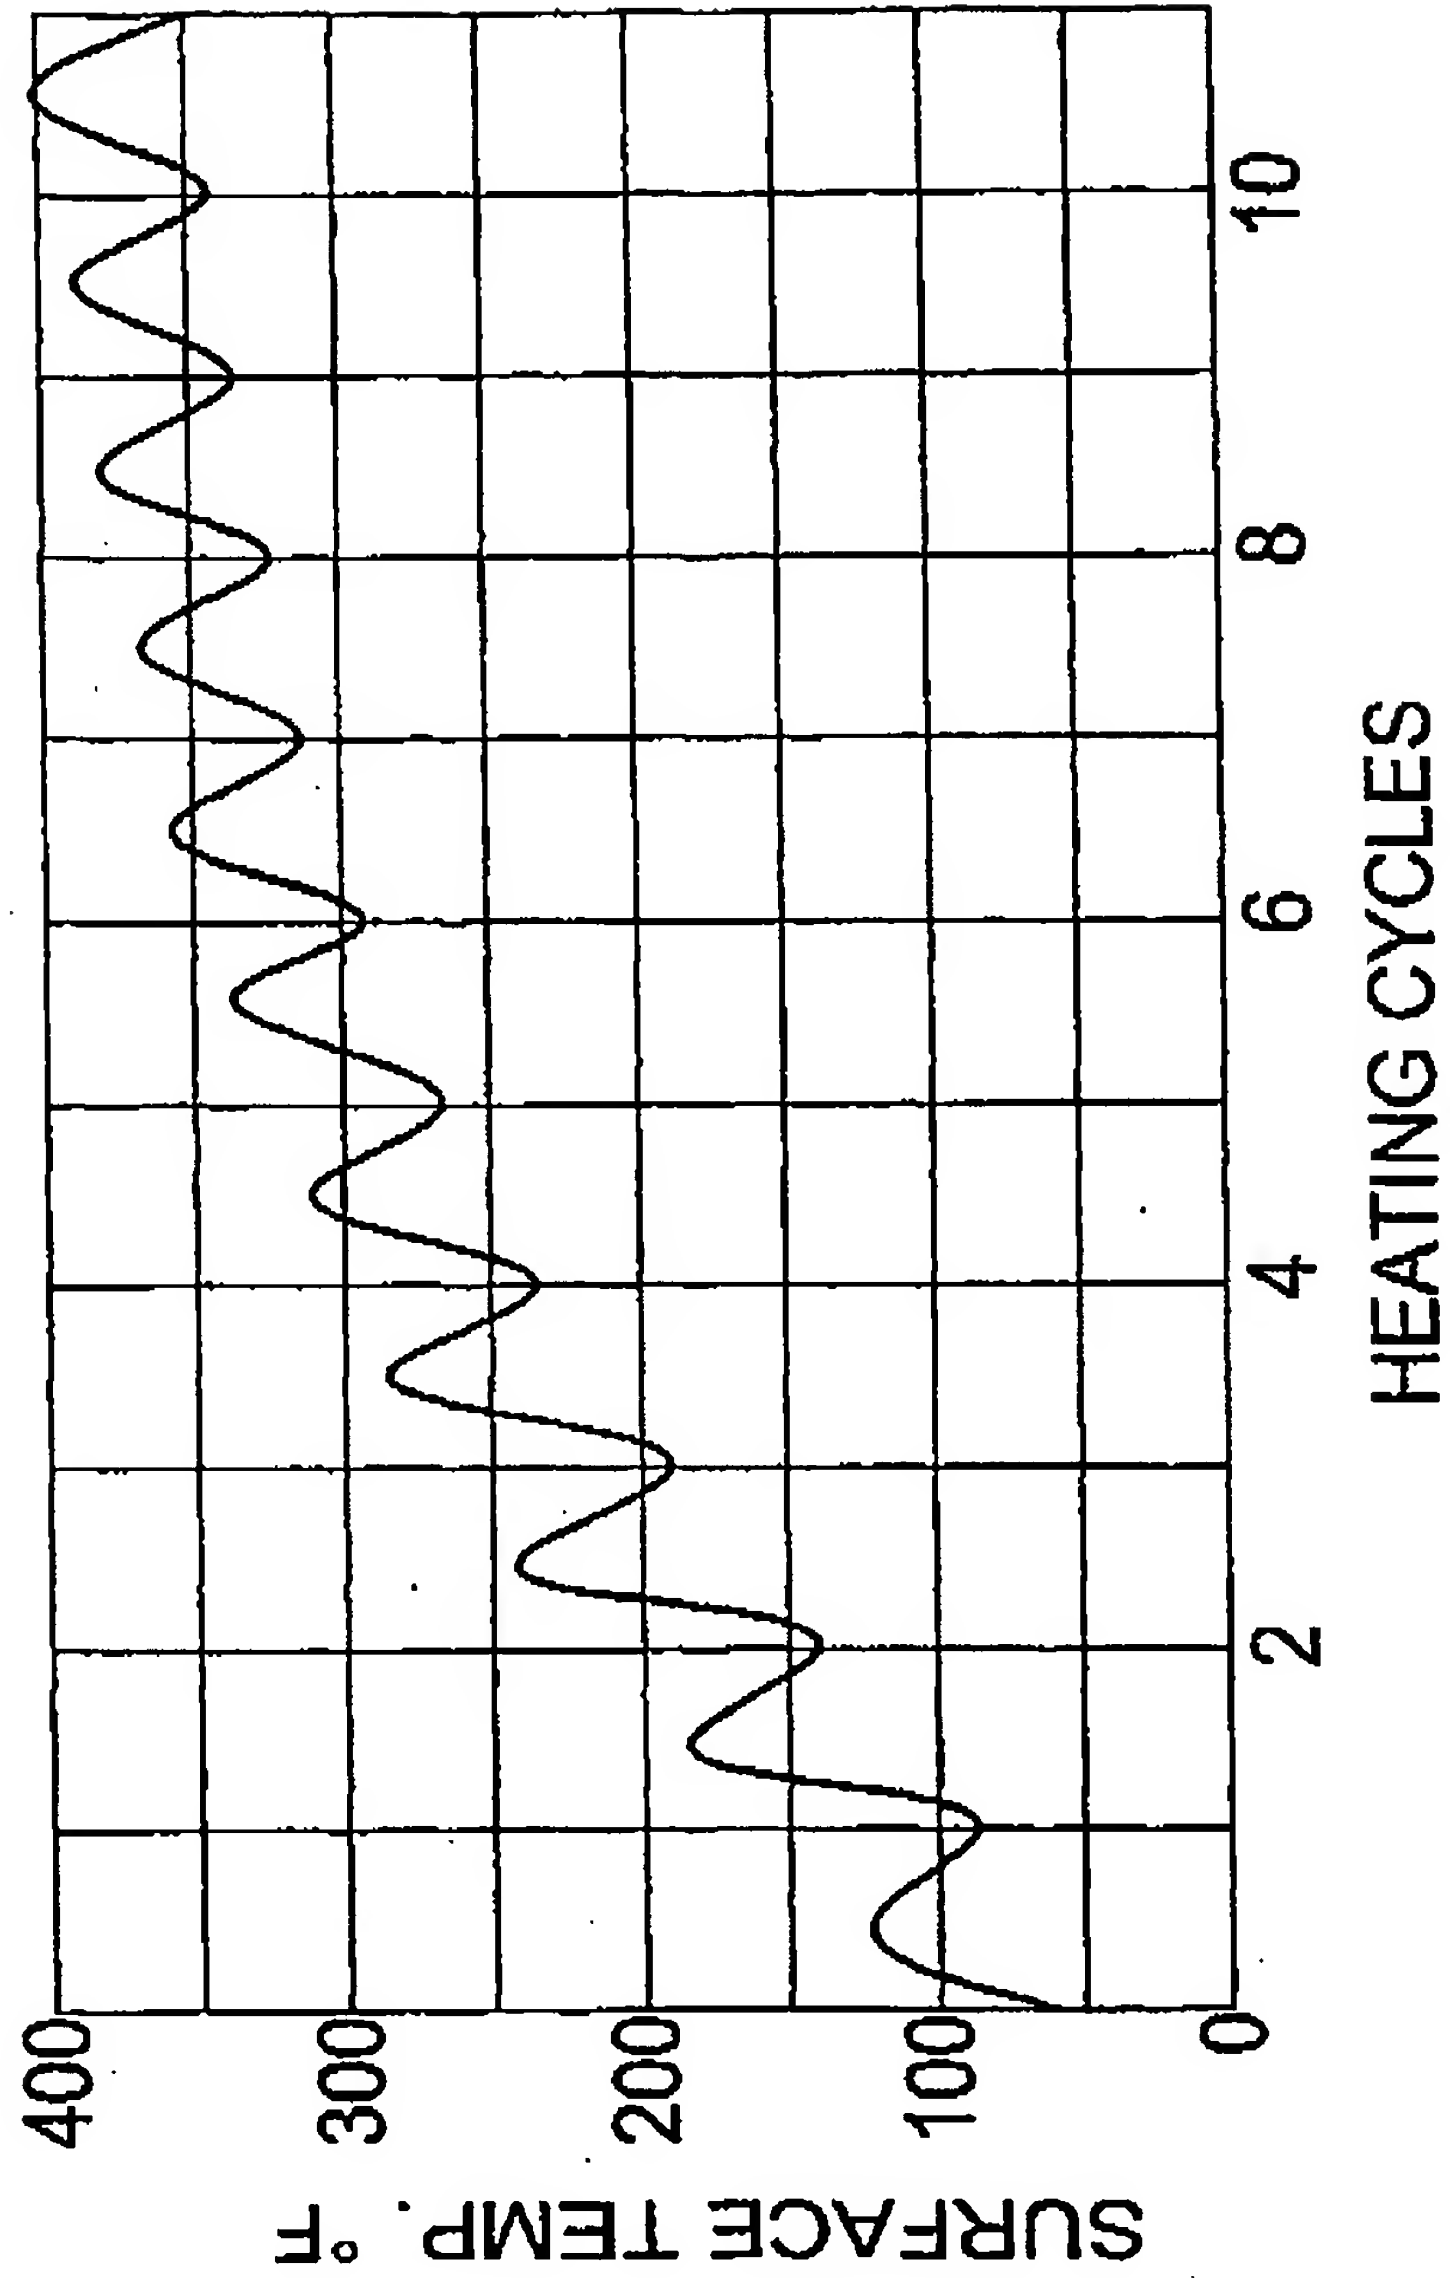

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.